

Artikel Nr.: 100052

Einlegerasterleuchte, Fly I, Weiß, 220-240V AC/50-60Hz, 2x max. 36,00 W



Technische Daten

Charakteristik

Material	Metall
Farbe	Weiß
Optik	
im Lieferumfang	

Elektrische Daten

Leistung	2x max. 36,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	2G11
Anzahl Sockel	2
Netzgerät	inkl. EVG
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	




Artikel Nr.: 100052

Einlegerasterleuchte, Fly I, Weiß, 220-240V AC/50-60Hz, 2x max. 36,00 W



Lichtrichtung

Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	symmetrisch

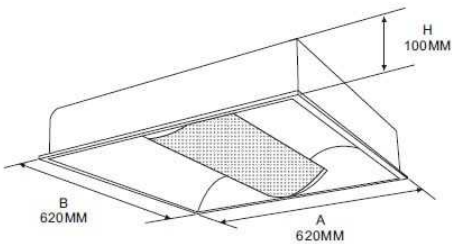

Abmessungen und Gewicht

Länge	620 mm
Breite	620 mm
Höhe	100 mm
Durchmesser	
Gewicht	6125 g

Grenzwerte

Betriebstemperatur	-5°C - +40°C
Lagertemperatur	
IP - Schutzart	IP20

EEL	Die Leuchte ist geeignet für Leuchtmittel der Energieeffizienzklassen A++ bis E
IP20	Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser.
	Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.

Article no.: 100052

Inlay raster lamp, Fly I, white, 220-240V AC/50-60Hz, 2x max. 36,00 W



Technical Data

General Characteristics

Material	metal
Colour	white
Optics	
included in delivery	

Electrical Characteristics

Power	2x max. 36,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	2G11
Number of Bases	2
Power supply unit	incl. EVG
Connection possibility	clamp
Protection class I, II, III	




Article no.: 100052

Inlay raster lamp, Fly I, white, 220-240V AC/50-60Hz, 2x max. 36,00 W



Light Direction

Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch

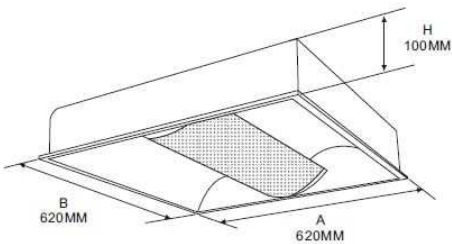

Dimensions & Weight

Length	620 mm
Width	620 mm
Height	100 mm
Diameter	
Product Weight	6125 g

Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	
IP - Code	IP20

EEL	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.