



Artikel Nr.: 348056

Deckenaufbauleuchte, Scorpil VI, 220-240V AC/50-60Hz, 6x max. 25,00 W



Technische Daten

Charakteristik

Material	Metall
Farbe	
Optik	Chrom
im Lieferumfang	2x Schrauben mit Dübel 1x Demontagehilfe



Elektrische Daten

Leistung	6x max. 25,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	G9
Anzahl Sockel	6
Netzgerät	
Ansteuerung	dimmbär über optionales Leuchtmittel
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I



Artikel Nr.: 348056

Deckenaufbauleuchte, Scorpil VI, 220-240V AC/50-60Hz, 6x max. 25,00 W



Lichtrichtung


Dreh- und Schwenkbereich	dreh-schwenkbar
Neigungswinkel	90 °
Abstrahlverhalten	
Reflektor / Linse	

Abmessungen und Gewicht

Länge	1774 mm
Breite	
Höhe	213 mm
Durchmesser	100 mm
Deckenabhängung	
Gewicht	1650 g

Sockelmaß

Länge	
Breite	
Höhe	25 mm
Durchmesser	100 mm

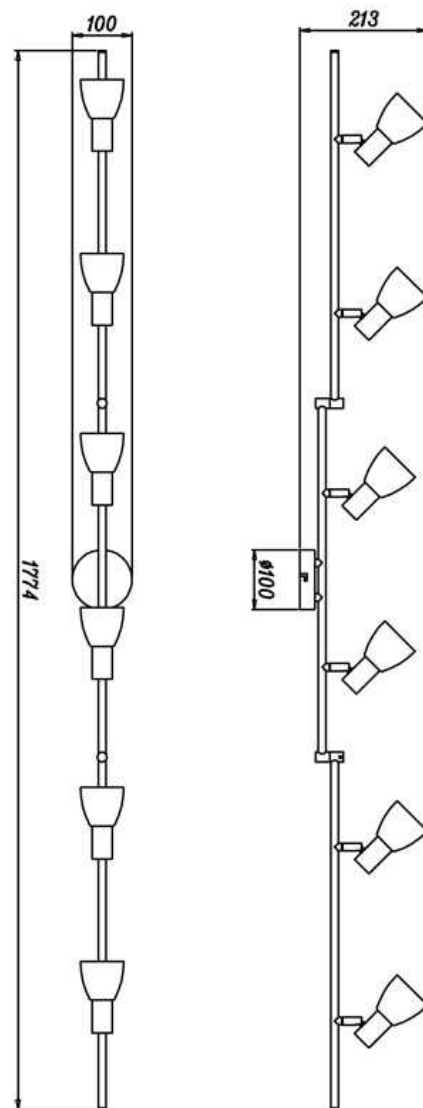



Artikel Nr.: 348056

Deckenaufbauleuchte, Scorpii VI, 220-240V AC/50-60Hz, 6x max. 25,00 W



Grenzwerte

Betriebstemperatur	-30°C - +50°C
Lagertemperatur	-40°C - +75°C
IP - Schutzart	IP 20

EEL	Die Leuchte ist geeignet für Leuchtmittel der Energieeffizienzklassen A++ bis E
-----	---

IP 20	Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser.
-------	---



Leuchte der Schutzklasse I
bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.



Article no.: 348056

Surface mounted ceiling lamp, Scorpii VI, 220-240V AC/50-60Hz, 6x max. 25,00 W



Technical Data

General Characteristics

Material	metal
Colour	
Optics	chrome
included in delivery	2x screws with dowels 1x mounting bracket

Electrical Characteristics

Power	6x max. 25,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	G9
Number of bases	6
Power supply unit	
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I



Article no.: 348056

Surface mounted ceiling lamp, Scorpii VI, 220-240V AC/50-60Hz, 6x max. 25,00 W



Light Direction


Rotating and tilting range	rotatable-swivel
Angle of inclination	90 °
Radiation direction	
Reflector / lense	

Dimensions & Weight

Length	1774 mm
Width	
Height	213 mm
Diameter	100 mm
Suspensions from ceiling	
Product Weight	1650 g

Base dimensions

Length	
Width	
Height	25 mm
Diameter	100 mm

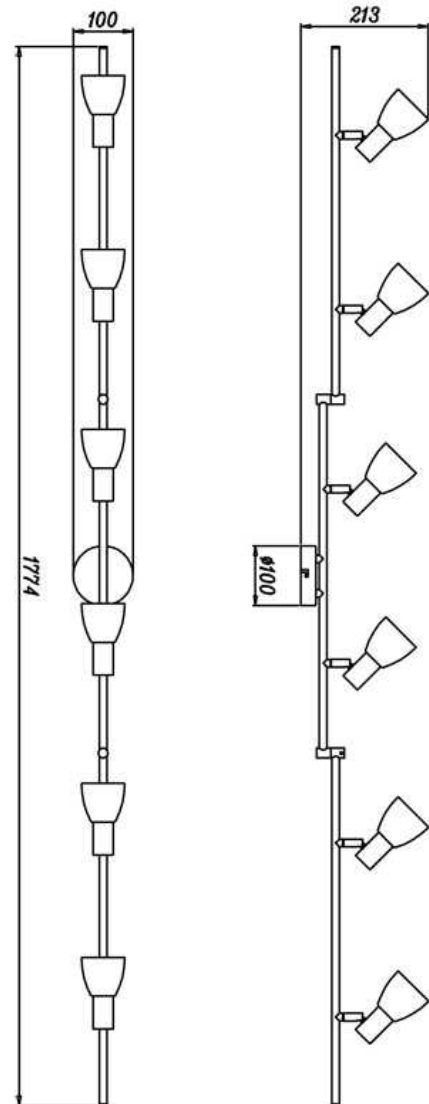

Article no.: 348056

Surface mounted ceiling lamp, Scorpil VI, 220-240V AC/50-60Hz, 6x max. 25,00 W



Absolute maximum ratings

Working temperature	-30°C - +50°C
Storage temperature	-40°C - +75°C
IP - Code	IP 20

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP 20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.