


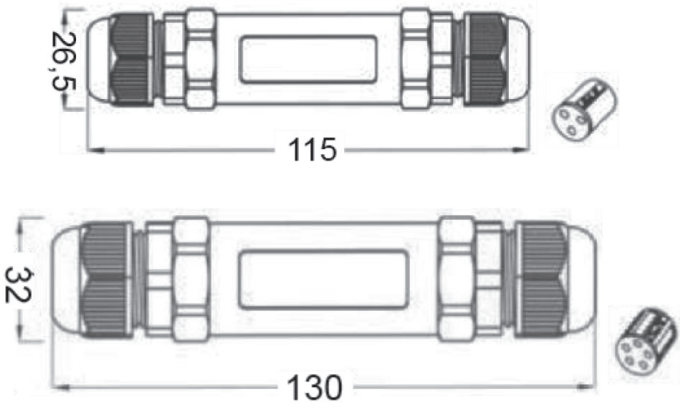


Artikel Nr.: 730001 / 730003

Wasserdichte Schraubverbindung aus PA66GF UL90 VO GWT 960°C /
waterproofed screwed cable gland, material PA66GF UL90 VO GWT 960°C

| | | |
|--|--|-----------------------------|
|  <p> RoHS 2002/95/EC IP68 </p> |  | |
| <p>Beschreibung description</p> | 730001 | 730003 |
| <p>Gehäusematerial case material</p> | PA66GF UL90 VO GWT 960°C | |
| <p>Gehäusefarbe case colour</p> | schwarz black | |
| <p>Abmessungen dimensions</p> | 115x26,5mm | 130x32mm |
| <p>passende Kabel suitable cable</p> | H05VV-F | H05VV-F |
| <p>Pole pole</p> | 3 | 5 |
| <p>min Querschnitt / Durchmesser min cross-section / diameter</p> | 3G1,5mm ² / Ø7mm | 5G1,5mm ² / Ø8mm |
| <p>max Querschnitt / Durchmesser max cross-section / diameter</p> | 3G4mm ² / Ø13mm | 5G4mm ² / Ø17mm |
| <p>max Strom max current</p> | 32A | 32A |
| <p>max Spannung max voltage</p> | 450Vac | 450Vac |
| <p>max Druck max pressure</p> | 5 Bar | 5 Bar |
| <p>Temperatur temperature</p> | -40°C - 85°C | -40°C - 85°C |