

**Artikel Nr.: 731063**

Wandaufbauleuchte, Merak, Weiß, 220-240V AC/50-60Hz, 1x max. 11,00 W



**Technische Daten**

**Charakteristik**

<b>Material</b>	Edelstahl
<b>Farbe</b>	Weiß
<b>Optik</b>	
<b>im Lieferumfang</b>	Max.11W LED/ESL



**Elektrische Daten**

<b>Leistung</b>	1x max. 11,00 W
<b>Eingangsspannung</b>	220-240V AC/50-60Hz
<b>Eingangsstrom</b>	
<b>Fassung / Sockel</b>	E27
<b>Anzahl Sockel</b>	1
<b>Netzgerät</b>	
<b>Ansteuerung</b>	dimmbar über optionales Leuchtmittel
<b>Anschlussmöglichkeit</b>	Klemme
<b>Schutzklasse I, II, III</b>	I



**Artikel Nr.: 731063**

Wandaufbauleuchte, Merak, Weiß, 220-240V AC/50-60Hz, 1x max. 11,00 W



**Lichtrichtung**


Dreh- und Schwenkbereich	
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	

**Abmessungen und Gewicht**

Länge	180 mm
Breite	102 mm
Höhe	200 mm
Durchmesser	102 mm
Deckenabhängung	
Gewicht	800 g

**Sockelmaß**

Länge	100 mm
Breite	70 mm
Höhe	
Durchmesser	

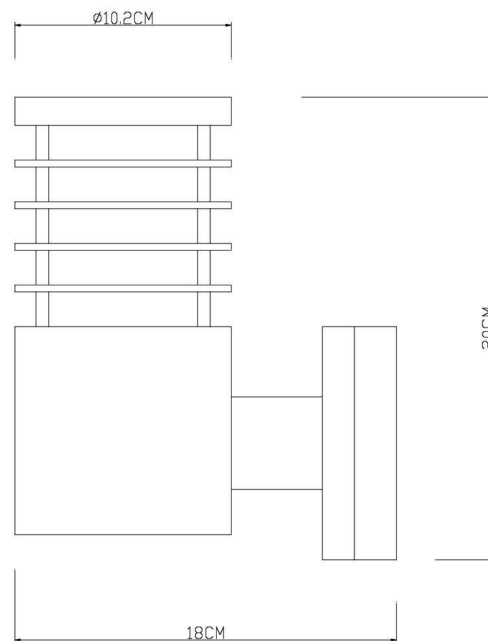



**Artikel Nr.: 731063**

Wandaufbauleuchte, Merak, Weiß, 220-240V AC/50-60Hz, 1x max. 11,00 W



**Grenzwerte**

Betriebstemperatur	-20°C - +40°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP 44

**EEl** Die Leuchte ist geeignet für Leuchtmittel der Energieeffizienzklassen A++ bis E

**IP 44** Schutz gegen das Eindringen von Fremdkörper > 1 mm. Geschützt gegen Spritzwasser.



Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.

**Article no.: 731063**

Surface mounted wall lamp, Merak, white, 220-240V AC/50-60Hz, 1x max. 11,00 W



**Technical Data**

**General Characteristics**

<b>Material</b>	stainless steel
<b>Colour</b>	white
<b>Optics</b>	
<b>included in delivery</b>	Max.11W LED/ESL



**Electrical Characteristics**

<b>Power</b>	1x max. 11,00 W
<b>Input voltage</b>	220-240V AC/50-60Hz
<b>Input current</b>	
<b>Base (standard designation)</b>	E27
<b>Number of bases</b>	1
<b>Power supply unit</b>	
<b>Electronically reversible</b>	dimnable via optional bulb
<b>Connection possibility</b>	clamp
<b>Protection class I, II, III</b>	I



**Article no.: 731063**

Surface mounted wall lamp, Merak, white, 220-240V AC/50-60Hz, 1x max. 11,00 W



**Light Direction**


Rotating and tilting range	
Angle of inclination	
Radiation direction	
Reflector / lense	

**Dimensions & Weight**

Length	180 mm
Width	102 mm
Height	200 mm
Diameter	102 mm
Suspensions from ceiling	
Product Weight	800 g

**Base dimensions**

Length	100 mm
Width	70 mm
Height	
Diameter	

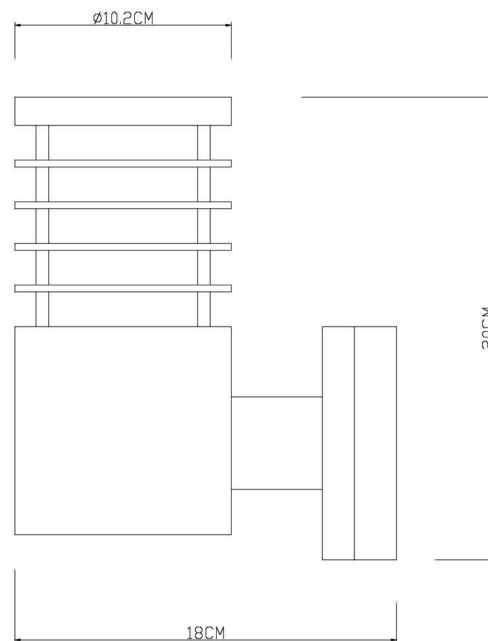



**Article no.: 731063**

Surface mounted wall lamp, Merak, white, 220-240V AC/50-60Hz, 1x max. 11,00 W



**Absolute maximum ratings**

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP 44

---

**EEl** The luminaire is suitable for lamps of energy efficiency classes A++ to E.

---

**IP 44** Protection against penetration of foreign objects > 1 mm. Protection against penetration of splashing water.



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.

---