



Artikel Nr.: 731065

Wandaufbauleuchte, Zilly II Down, Kupfer, 220-240V AC/50-60Hz, 1x max. 35,00 W



Technische Daten

Charakteristik

Material	Edelstahl
Farbe	Kupfer
Optik	
im Lieferumfang	2x Schrauben mit Dübel



Elektrische Daten

Leistung	1x max. 35,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	GU10
Anzahl Sockel	1
Netzgerät	
Ansteuerung	dimmbar über optionales Leuchtmittel
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I





Artikel Nr.: 731065

Wandaufbauleuchte, Zilly II Down, Kupfer, 220-240V AC/50-60Hz, 1x max. 35,00 W



Lichtrichtung


Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	

Abmessungen und Gewicht

Länge	105 mm
Breite	60 mm
Höhe	125 mm
Durchmesser	60 mm
Deckenabhängung	
Gewicht	380 g

Sockelmaß

Länge	105 mm
Breite	45 mm
Höhe	23 mm
Durchmesser	

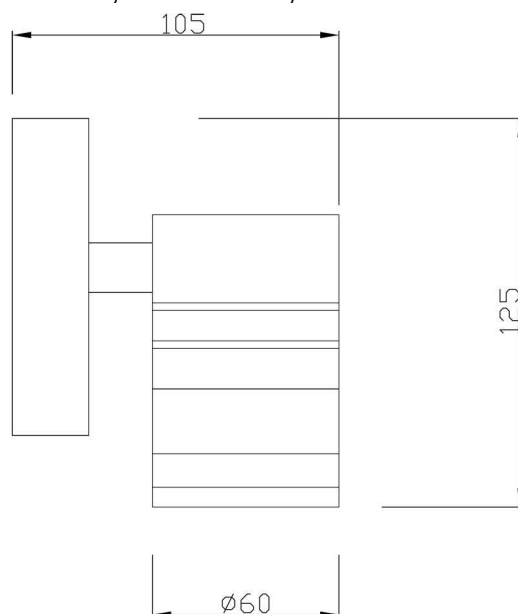



Artikel Nr.: 731065

Wandaufbauleuchte, Zilly II Down, Kupfer, 220-240V AC/50-60Hz, 1x max. 35,00 W



Grenzwerte

Betriebstemperatur	-20°C - +40°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP 44

EEI	Die Leuchte ist geeignet für Leuchtmittel der Energieeffizienzklassen A++ bis E
-----	---

IP 44	Schutz gegen das Eindringen von Fremdkörper > 1 mm. Geschützt gegen Spritzwasser.
-------	---



Leuchte der Schutzklasse I
bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.



Article no.: 731065

Surface mounted wall lamp, Zilly II Down, copper, 220-240V AC/50-60Hz, 1x max. 35,00 W



Technical Data

General Characteristics

Material	stainless steel
Colour	copper
Optics	
included in delivery	2x screws with dowels



Electrical Characteristics

Power	1x max. 35,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	GU10
Number of bases	1
Power supply unit	
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I





Article no.: 731065

Surface mounted wall lamp, Zilly II Down, copper, 220-240V AC/50-60Hz, 1x max. 35,00 W



Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

Dimensions & Weight

Length	105 mm
Width	60 mm
Height	125 mm
Diameter	60 mm
Suspensions from ceiling	
Product Weight	380 g

Base dimensions

Length	105 mm
Width	45 mm
Height	23 mm
Diameter	

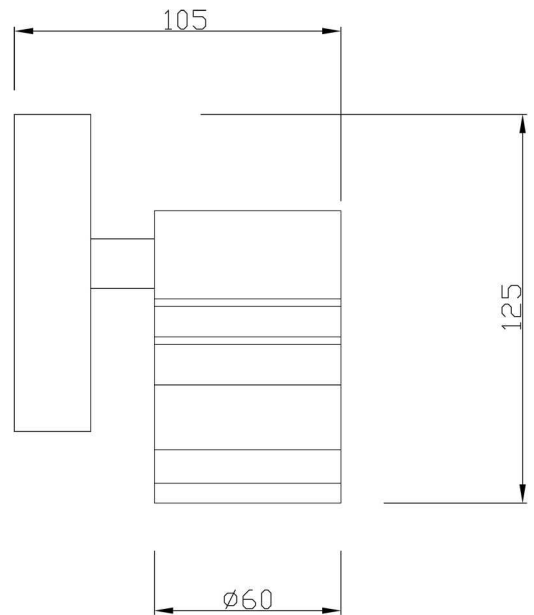

Article no.: 731065

Surface mounted wall lamp, Zilly II Down, copper, 220-240V AC/50-60Hz, 1x max. 35,00 W



Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP 44

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP 44	Protection against penetration of foreign objects > 1 mm. Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.