

Artikel Nr.: 733020

Stehleuchte, Zilly II, Kupfer, 220-240V AC/50-60Hz, 1x max. 35,00 W



Technische Daten

Charakteristik

Material	Edelstahl
Farbe	Kupfer
Optik	
im Lieferumfang	3x Schrauben mit Dübel



Elektrische Daten

Leistung	1x max. 35,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	GU10
Anzahl Sockel	1
Netzgerät	
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I



Artikel Nr.: 733020

Stehleuchte, Zilly II, Kupfer, 220-240V AC/50-60Hz, 1x max. 35,00 W



Lichtrichtung

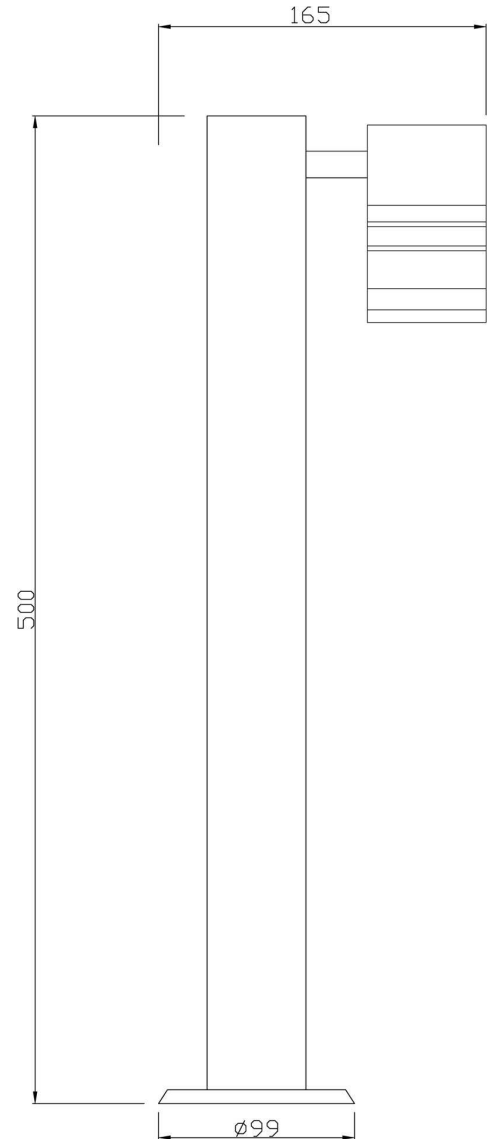
Dreh- und Schwenkbereich	drehbar
Neigungswinkel	140°
Abstrahlverhalten	
Reflektor / Linse	



Abmessungen und Gewicht

Länge	
Breite	165 mm
Höhe	500 mm
Durchmesser	60 mm
Gewicht	740 g

Grenzwerte

Betriebstemperatur	-20°C - +40°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP44



EEI	Die Leuchte ist geeignet für Leuchtmittel der Energieeffizienzklassen A++ bis E
IP44	Schutz gegen das Eindringen von Fremdkörper > 1 mm. Geschützt gegen Spritzwasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.
	Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.

Article no.: 733020

Floor lamp, Zilly II, copper, 220-240V AC/50-60Hz, 1x max. 35,00 W

**Technical Data****General Characteristics**

Material	stainless steel
Colour	copper
Optics	
included in delivery	3x screws with dowels

**Electrical Characteristics**

Power	1x max. 35,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	GU10
Number of Bases	1
Power supply unit	
Connection possibility	clamp
Protection class I, II, III	I



Article no.: 733020

Floor lamp, Zilly II, copper, 220-240V AC/50-60Hz, 1x max. 35,00 W



Light Direction

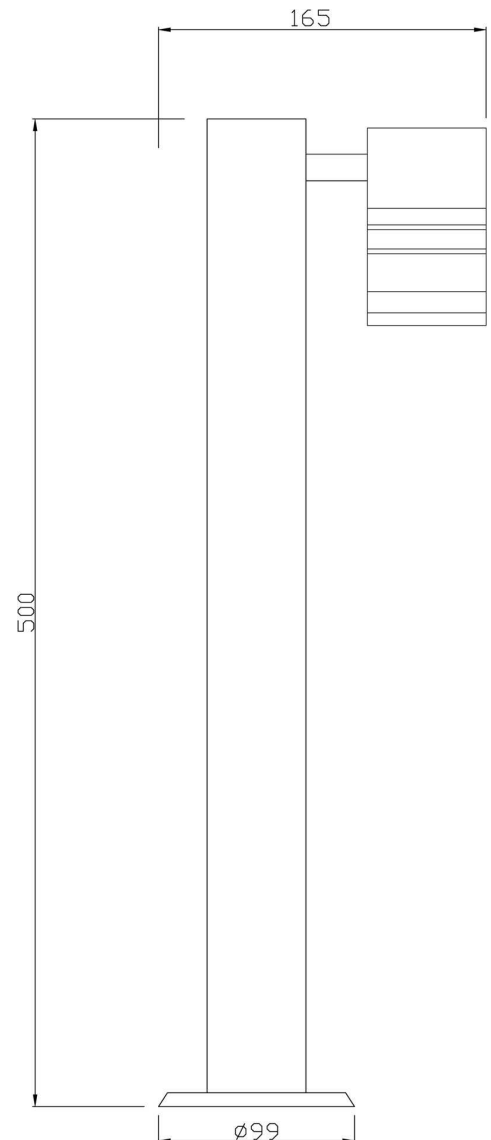
Rotating and tilting range	rotatable
Angle of inclination	140°
Radiation direction	
Reflector / lense	



Dimensions & Weight

Length	
Width	165 mm
Height	500 mm
Diameter	60 mm
Product Weight	740 g

Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP44



EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP44	Protection against penetration of foreign objects > 1 mm. Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.