

Artikel Nr.: 843274

Netzgerät, BASIC, DIM, CV, HV DMX 12V/135W



IP20 CE

Elektrische Daten

Betriebsart	spannungskonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	135,00 W	Leistungsfaktor	0,9
Ausgangsspannung	12V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	0-11250 mA		

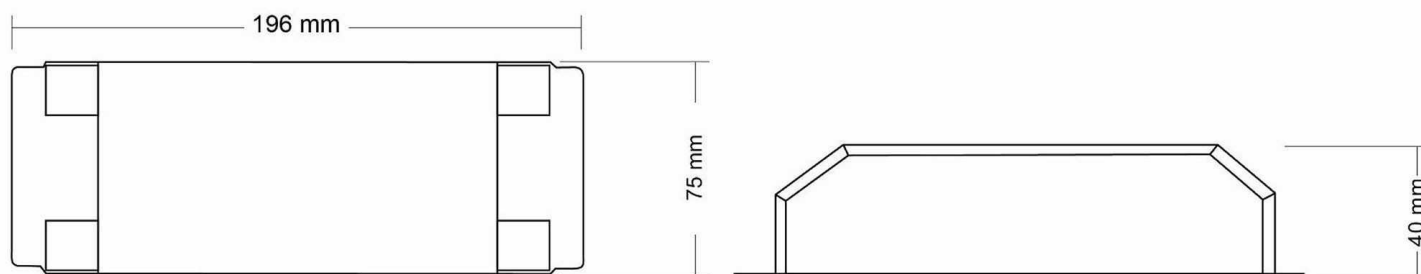
Produkteigenschaften

Schutzklasse I	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau nicht geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
dimmbar - DMX512	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 843274

Netzgerät, BASIC, DIM, CV, HV DMX 12V/135W

**Abmessungen und Gewicht****Grenzwerte**

Länge	196,00 mm	Betriebstemperatur	-30°C - +40°C
Breite	75,00 mm	Gehäusetemperatur	0 °C
Höhe	40,00 mm	max. Menge Sicherungsautomaten	B10A=7, B16A=12, C10A=16, C16A=25
Durchmesser	0,00 mm	max. Einschaltstrom	23A/320µs
Gewicht	660 g	kapazitive Last	

Article No.: 843274

Power supply unit, BASIC, DIM, CV, HV DMX 12V/135W













IP20 CE

Electrical Characteristics

Operating mode	constant voltage	Input voltage	100-240V AC/50-60Hz
Power	135,00 W	Power factor	0,9
Output voltage	12V DC	Connection possibility	clamp
Output current	0-11250 mA		

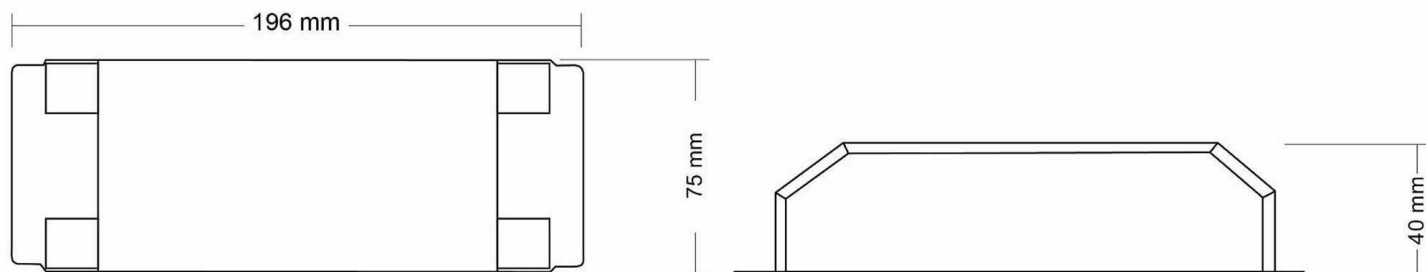
Product features

 Protection class I	 Overvoltage protection
 Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Not suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 dimmable - DMX512	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 843274

Power supply unit, BASIC, DIM, CV, HV DMX 12V/135W

**Dimensions & Weight****Absolute maximum ratings**

Length	196,00 mm	Operating temperature	-30°C - +40°C
Width	75,00 mm	Case temperature	0 °C
Height	40,00 mm	max. amount of circuit breakers	B10A=7, B16A=12, C10A=16, C16A=25
Diameter	0,00 mm	max. inrush current	23A/320µs
Product weight	660 g	capacitive load	