

**Artikel Nr.: 862031**

Netzgerät, OCTO, DIM, CC, MiniD35012NT/12W












IP65 CE

**Elektrische Daten**

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	6,30-12,00 W	Leistungsfaktor	0,95
Ausgangsspannung	18-35V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	350 mA		

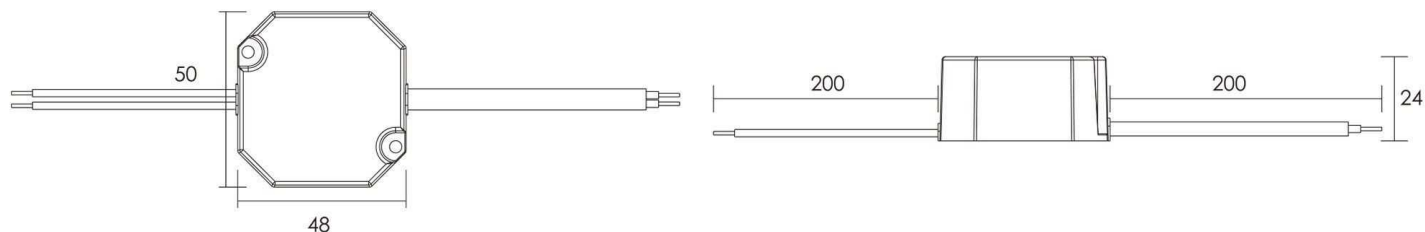
**Produkteigenschaften**

 Schutzklasse II	 Überspannungsschutz
SELV Schutzkleinspannung	 Lampenbetriebsgerät 110
 Kurzschlußfest	 Möbeleinbau geeignet
 Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
 Übertemperaturschutz	LVD Sicherheit nach EN 61347
 Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
 dimmbar - Phasen-/abschnitt	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 862031**

Netzgerät, OCTO, DIM, CC, MiniD35012NT/12W

**Abmessungen und Gewicht****Grenzwerte**

Länge	50,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	48,00 mm	Gehäusetemperatur	80 °C
Höhe	24,00 mm	max. Menge Sicherungsautomaten	B10A=35, B16A=56, C10A=74, C16A=118
Durchmesser	0,00 mm	max. Einschaltstrom	5A/300µs
Gewicht	90 g	kapazitive Last	39,34pF

**Article No.: 862031**

Power supply unit, OCTO, DIM, CC, MiniD35012NT/12W












**IP65 CE**

**Electrical Characteristics**

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	6,30-12,00 W	Power factor	0,95
Output voltage	18-35V DC	Connection possibility	wire with open ends
Output current	350 mA		

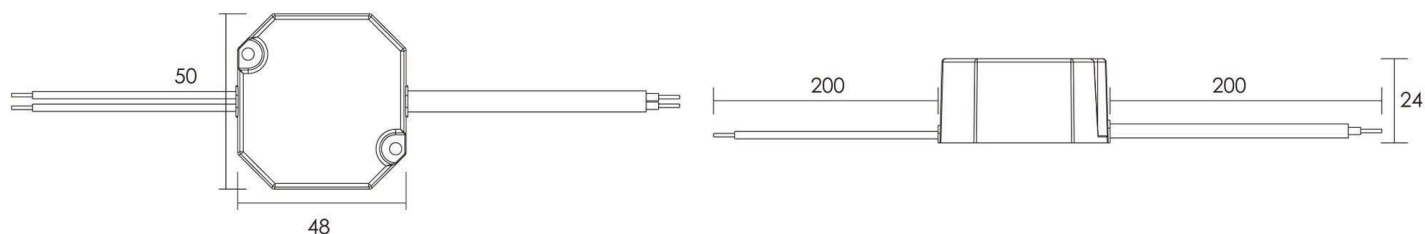
**Product features**

 Protection class II	 Overvoltage protection
<b>SELV</b> Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Suitable for furniture installation
 Overload protection	<b>ErP</b> Standby-power consumption < 0,5 W
 Overheating protection	<b>LVD</b> Safety according to EN 61347
 Safety transformer	<b>EMC</b> Interference suppression + immunity according to EN 55015 + EN 61547
 dimmable - leading/trailing edge	<b>EMC</b> Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 862031**

Power supply unit, OCTO, DIM, CC, MiniD35012NT/12W

**Dimensions & Weight****Absolute maximum ratings**

Length	50,00 mm	Operating temperature	-20°C - +50°C
Width	48,00 mm	Case temperature	80 °C
Height	24,00 mm	max. amount of circuit breakers	B10A=35, B16A=56, C10A=74, C16A=118
Diameter	0,00 mm	max. inrush current	5A/300µs
Product weight	90 g	capacitive load	39,34pF