

**Artikel Nr.: 862092**

Netzgerät, BASIC, DIM, CV, 24V 34-100W



IP20 CE

**Elektrische Daten**

Betriebsart	spannungskonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	34,00-100,00 W	Leistungsfaktor	0,95
Ausgangsspannung	24V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	1420-4165 mA		

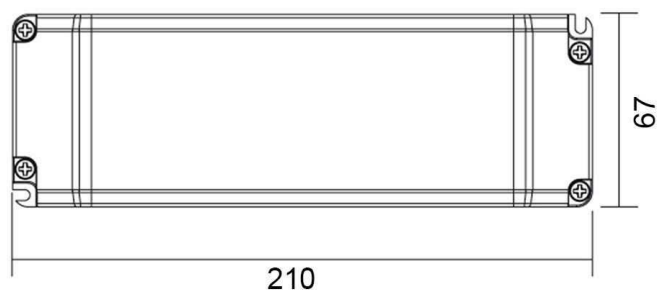
**Produkteigenschaften**

Schutzklasse II	Überspannungsschutz
<b>SELV</b> Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau geeignet
Überlastschutz	<b>ErP</b> Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	<b>LVD</b> Sicherheit nach EN 61347
Sicherheitstrafo	<b>EMC</b> Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
dimmbar - Phasen-/abschnitt	<b>EMC</b> Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 862092**

Netzgerät, BASIC, DIM, CV, 24V 34-100W

**Abmessungen und Gewicht****Grenzwerte**

Länge	210,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	67,00 mm	Gehäusetemperatur	80 °C
Höhe	34,00 mm	max. Menge Sicherungsautomaten	B10A=3, B16A=5, C10A=7, C16A=11
Durchmesser	0,00 mm	max. Einschaltstrom	50A/300µs
Gewicht	403 g	kapazitive Last	40,1nF

**Article No.: 862092**

Power supply unit, BASIC, DIM, CV, 24V 34-100W












IP20 CE

**Electrical Characteristics**

Operating mode	constant voltage	Input voltage	220-240V AC/50-60Hz
Power	34,00-100,00 W	Power factor	0,95
Output voltage	24V DC	Connection possibility	clamp
Output current	1420-4165 mA		

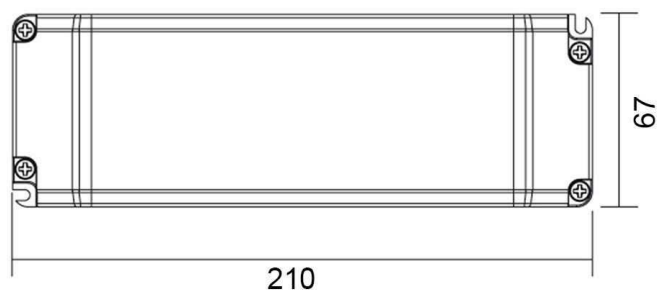
**Product features**

 Protection class II	 Overvoltage protection
SELV Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 dimmable - leading/trailing edge	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 862092**

Power supply unit, BASIC, DIM, CV, 24V 34-100W

**Dimensions & Weight****Absolute maximum ratings**

Length	210,00 mm	Operating temperature	-20°C - +50°C
Width	67,00 mm	Case temperature	80 °C
Height	34,00 mm	max. amount of circuit breakers	B10A=3, B16A=5, C10A=7, C16A=11
Diameter	0,00 mm	max. inrush current	50A/300µs
Product weight	403 g	capacitive load	40,1nF