


Artikel Nr.: 862143

Netzgerät, BASIC, DIM, Multi CC, EUP15D-1HMC-0

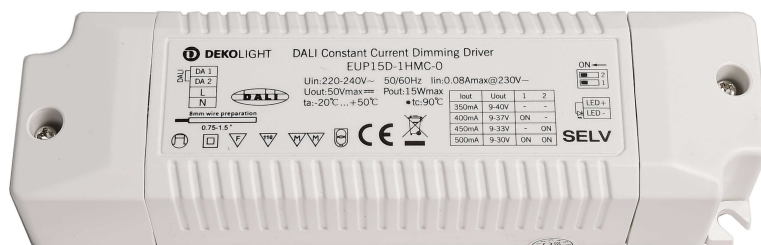

IP20 CE

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	3,20-15,00 W	Leistungsfaktor	0,95
Ausgangsspannung	9-40V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	350/400/450/500 mA		


Produkteigenschaften

Schutzklasse II	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
dimmbar - DALI-Bus nach IEC 62386 DALI 1.0	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862143

Netzgerät, BASIC, DIM, Multi CC, EUP15D-1HMC-0

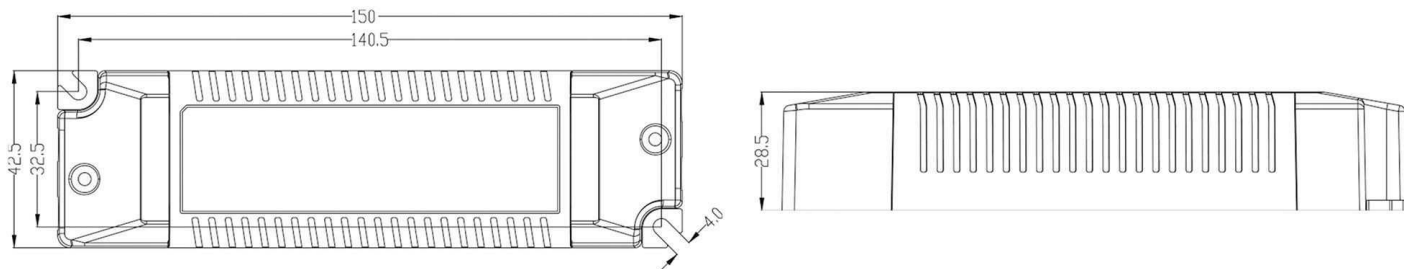

Abmessungen und Gewicht



Grenzwerte

Länge	150,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	42,50 mm	Gehäusetemperatur	90 °C
Höhe	28,50 mm	max. Menge Sicherungsautomaten	B10A=38, B16A=62, C10A=77, C16A=124
Durchmesser	0,00 mm	max. Einschaltstrom	18A/14µs
Gewicht	120 g	kapazitive Last	

Multi-CC variable Leistungs-/Spannungsbereiche / Multi-CC variable power/voltage ranges


Stromstärke / Current	Leistung / Power	Spannung / Voltage
350mA	3,20W - 14,00W	9V - 40V
400mA	3,60W - 14,80W	9V - 37V
450mA	4,00W - 14,80W	9V - 33V
500mA	4,50W - 15,00W	9V - 30V

max. 2 Lampen je Kanal - Spannungsbereich überprüfen! / max. 2 lamps per channel - check voltage range!



Article No.: 862143

Power supply unit, BASIC, DIM, Multi CC, EUP15D-1HMC-0

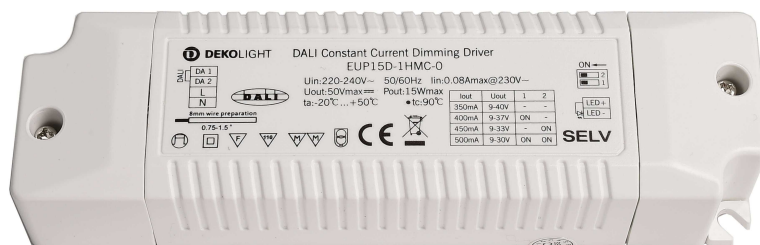










IP20 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	3,20-15,00 W	Power factor	0,95
Output voltage	9-40V DC	Connection possibility	clamp
Output current	350/400/450/500 mA		


Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - DALI-Bus according to IEC 62386 DALI 1.0	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862143

Power supply unit, BASIC, DIM, Multi CC, EUP15D-1HMC-0

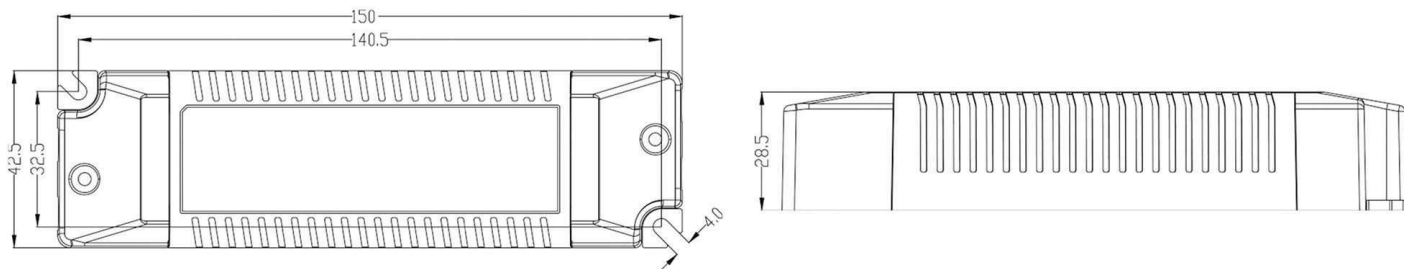

Dimensions & Weight

Absolute maximum ratings

Length	150,00 mm	Operating temperature	-20°C - +50°C
Width	42,50 mm	Case temperature	90 °C
Height	28,50 mm	max. amount of circuit breakers	B10A=38, B16A=62, C10A=77, C16A=124
Diameter	0,00 mm	max. inrush current	18A/14µs
Product weight	120 g	capacitive load	

Multi-CC variable Leistungs-/Spannungsbereiche / Multi-CC variable power/voltage ranges

Stromstärke / Current	Leistung / Power	Spannung / Voltage
350mA	3,20W - 14,00W	9V - 40V
400mA	3,60W - 14,80W	9V - 37V
450mA	4,00W - 14,80W	9V - 33V
500mA	4,50W - 15,00W	9V - 30V

max. 2 Lampen je Kanal - Spannungsbereich überprüfen! / max. 2 lamps per channel - check voltage range!

