


Artikel Nr.: 862160

Netzgerät, BASIC, DIM, CV, 200AD-12V, DALI-Bus / Push / 1-10V





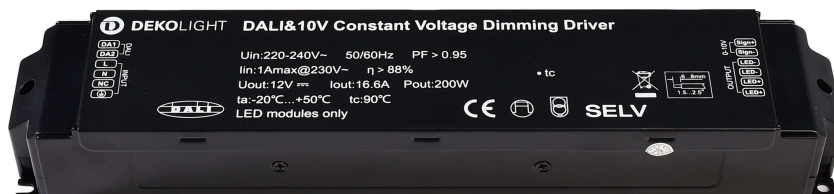






IP20 CE

Elektrische Daten

Betriebsart	spannungskonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	200,00 W	Leistungsfaktor	0,95
Ausgangsspannung	12V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	0-16700 mA		


Produkteigenschaften

 Schutzklasse I	 Überspannungsschutz
SELV Schutzkleinspannung	 Lampenbetriebsgerät 110
 Kurzschlußfest	 Möbeleinbau nicht geeignet
 Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
 Übertemperaturschutz	LVD Sicherheit nach EN 61347
 Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
 dimmbar - DALI-Bus nach IEC 62386 DALI 1.0 / Push / 1-10V	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862160


Netzgerät, BASIC, DIM, CV, 200AD-12V, DALI-Bus / Push / 1-10V

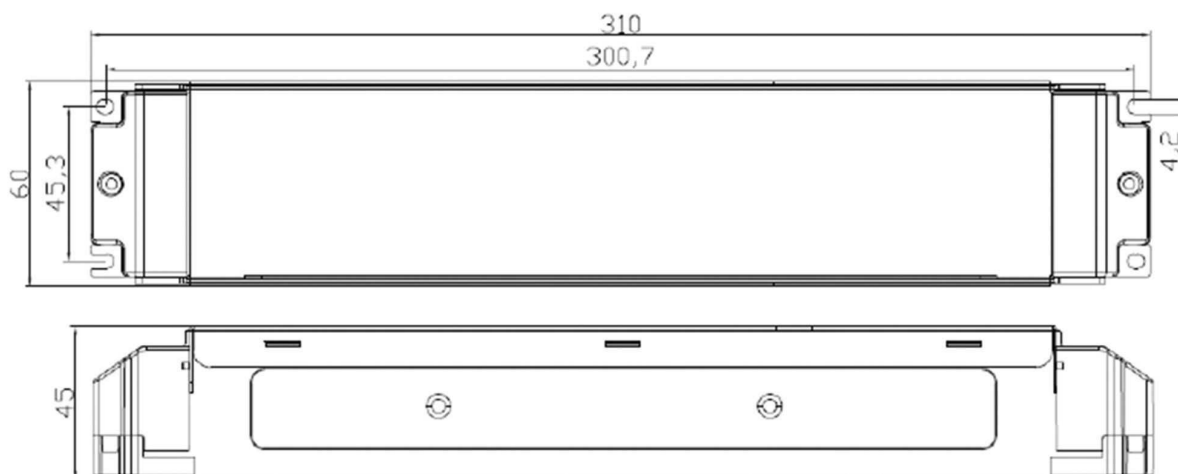**Abmessungen und Gewicht****Grenzwerte**

Länge	310,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	60,00 mm	Gehäusetemperatur	90 °C
Höhe	45,00 mm	max. Menge Sicherungsautomaten	B10A=3, B16A=5, C10A=5, C16A=9
Durchmesser	0,00 mm	max. Einschaltstrom	28A/1250µs
Gewicht	808 g	kapazitive Last	

Article No.: 862160

Power supply unit, BASIC, DIM, CV, 200AD-12V, DALI-Bus / Push / 1-10V

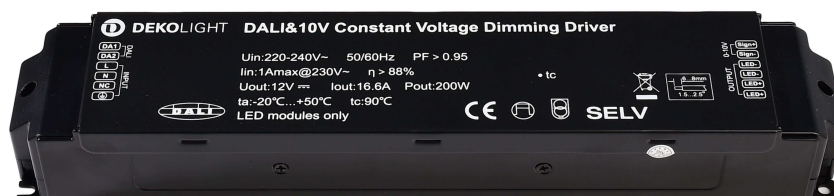










IP20 CE

Electrical Characteristics

Operating mode	constant voltage	Input voltage	220-240V AC/50-60Hz
Power	200,00 W	Power factor	0,95
Output voltage	12V DC	Connection possibility	clamp
Output current	0-16700 mA		


Product features

 Protection class I	 Overvoltage protection
SELV Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Not suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 dimmable - DALI-Bus according to IEC 62386 DALI 1.0 / Push / 1-10V	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862160

Power supply unit, BASIC, DIM, CV, 200AD-12V, DALI-Bus / Push / 1-10V

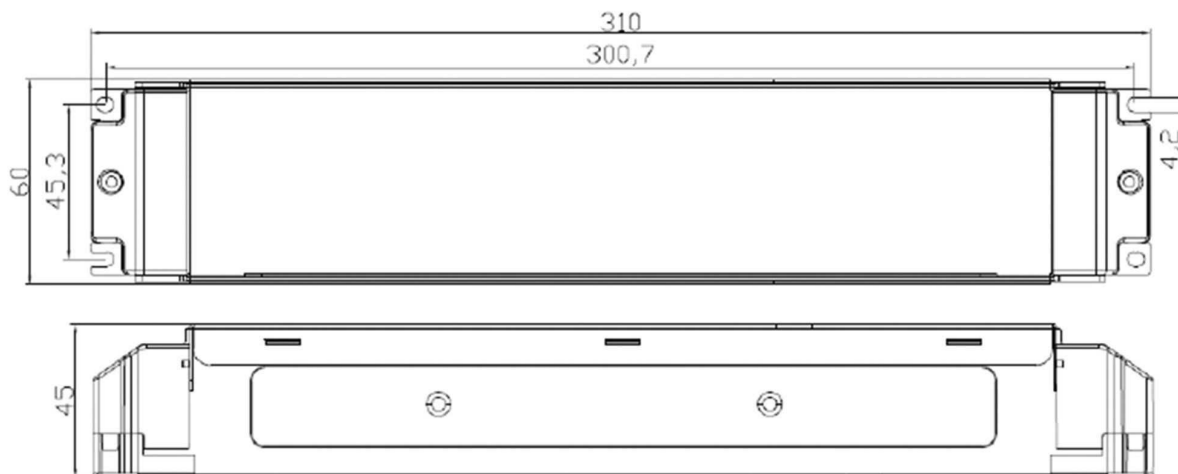**Dimensions & Weight****Absolute maximum ratings**

Length	310,00 mm	Operating temperature	-20°C - +50°C
Width	60,00 mm	Case temperature	90 °C
Height	45,00 mm	max. amount of circuit breakers	B10A=3, B16A=5, C10A=5, C16A=9
Diameter	0,00 mm	max. inrush current	28A/1250µs
Product weight	808 g	capacitive load	