


Artikel Nr.: 862173

Netzgerät, LONG-FLAT, CV, LT-150-24



IP20 CE

Elektrische Daten

| | | | |
|------------------|-------------------|---------------------|---------------------|
| Betriebsart | spannungskonstant | Eingangsspannung | 220-240V AC/50-60Hz |
| Leistung | 150,00 W | Leistungsfaktor | 0,95 |
| Ausgangsspannung | 24V DC | Anschlußmöglichkeit | Klemme |
| Ausgangsstrom | 0-6250 mA | | |


Produkteigenschaften

| | | | |
|---|----------------------|---|--|
|  | Schutzklasse II |  | Überspannungsschutz |
| SELV | Schutzkleinspannung |  | Lampenbetriebsgerät 110 |
|  | Kurzschlußfest |  | Möbeleinbau geeignet |
|  | Überlastschutz | ErP | Standby-Stromverbrauch < 0,5 W |
|  | Übertemperaturschutz | LVD | Sicherheit nach EN 61347 |
|  | Sicherheitstrafo | EMC | Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547 |
|  | nicht dimmbar | EMC | Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3 |

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862173


Netzgerät, LONG-FLAT, CV, LT-150-24

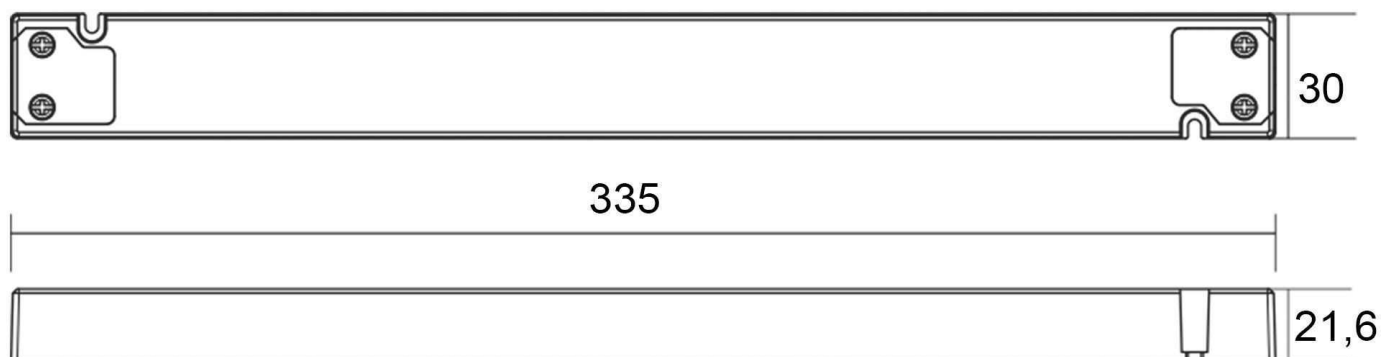**Abmessungen und Gewicht****Grenzwerte**

| | | | |
|-------------|-----------|-----------------------------------|------------------------------------|
| Länge | 335,00 mm | Betriebstemperatur | -20°C - +45°C |
| Breite | 30,00 mm | Gehäusetemperatur | 80 °C |
| Höhe | 21,60 mm | max. Menge Sicherungsautomaten | B10A=3, B16A=5, C10A=6, C16A=10 |
| Durchmesser | 0,00 mm | max. Einschaltstrom | 60A/300µs |
| Gewicht | 242 g | kapazitive Last | 451,2nF |

Article No.: 862173

Power supply unit, LONG-FLAT, CV, LT-150-24



IP20 CE

Electrical Characteristics

| | | | |
|----------------|------------------|------------------------|---------------------|
| Operating mode | constant voltage | Input voltage | 220-240V AC/50-60Hz |
| Power | 150,00 W | Power factor | 0,95 |
| Output voltage | 24V DC | Connection possibility | clamp |
| Output current | 0-6250 mA | | |


Product features

| | | | |
|---|--------------------------|---|--|
|  | Protection class II |  | Overvoltage protection |
| SELV | Low voltage protection |  | Lamp control gear 110 |
|  | Short circuit protection |  | Suitable for furniture installation |
|  | Overload protection | ErP | Standby-power consumption < 0,5 W |
|  | Overheating protection | LVD | Safety according to EN 61347 |
|  | Safety transformer | EMC | Interference suppression + immunity according to EN 55015 + EN 61547 |
|  | not dimmable | EMC | Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3 |

Black fields are applicable / gray fields are not applicable

Article No.: 862173

Power supply unit, LONG-FLAT, CV, LT-150-24

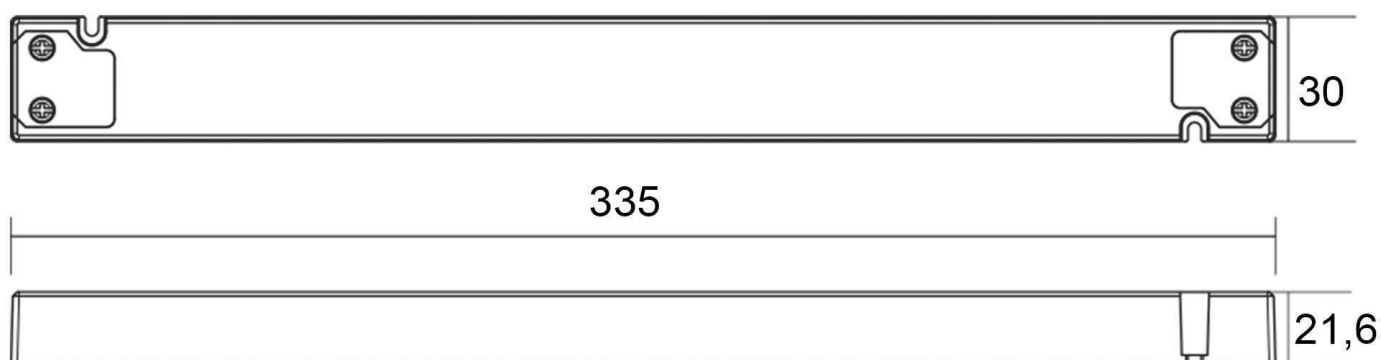**Dimensions & Weight****Absolute maximum ratings**

| | | | |
|----------------|-----------|---------------------------------|---------------------------------|
| Length | 335,00 mm | Operating temperature | -20°C - +45°C |
| Width | 30,00 mm | Case temperature | 80 °C |
| Height | 21,60 mm | max. amount of circuit breakers | B10A=3, B16A=5, C10A=6, C16A=10 |
| Diameter | 0,00 mm | max. inrush current | 60A/300µs |
| Product weight | 242 g | capacitive load | 451,2nF |