

Artikel Nr.: 862177

Netzgerät, BASIC, DIM, Multi CC, EUP30D-1HMC-0, DALI 2.0












IP20 **CE**

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	24,70-30,60 W	Leistungsfaktor	0,87
Ausgangsspannung	9-45V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	550/600/650/700/750/800/850/900mA		

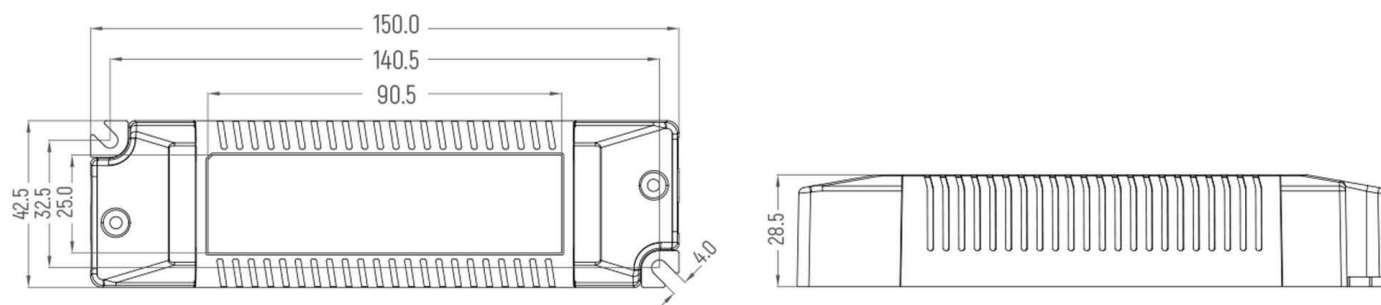
Produkteigenschaften

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau nicht geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - DALI-Bus nach IEC 62386 DALI 2.0 / Intelli-Push	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862177



Netzgerät, BASIC, DIM, Multi CC, EUP30D-1HMC-0, DALI 2.0

**Abmessungen und Gewicht****Grenzwerte**

Länge	150,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	42,50 mm	Gehäusetemperatur	85 °C
Höhe	28,50 mm	max. Menge Sicherungsautomaten	B10A=25, B16A=40, C10A=50, C16A=80
Durchmesser	0,00 mm	max. Einschaltstrom	28A/14µs
Gewicht	124 g	kapazitive Last	

Multi-CC variable Leistungs-/Spannungsbereiche / Multi-CC variable power/voltage ranges

Stromstärke / Current	Leistung / Power	Spannung / Voltage
550mA	5,00W - 24,70W	9V - 45V
600mA	5,40W - 27,00W	9V - 45V
650mA	5,90W - 29,00W	9V - 45V
700mA	6,30W - 30,10W	9V - 43V
750mA	6,80W - 30,00W	9V - 40V
800mA	7,20W - 30,40W	9V - 38V
850mA	7,70W - 29,70W	9V - 35V
900mA	8,10W - 30,60W	9V - 34V

max. 2 Lampen je Kanal - Spannungsbereich überprüfen! / max. 2 lamps per channel - check voltage range!

Article No.: 862177

Power supply unit, BASIC, DIM, Multi CC, EUP30D-1HMC-0, DALI 2.0












IP20 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	24,70-30,60 W	Power factor	0,87
Output voltage	9-45V DC	Connection possibility	clamp
Output current	550/600/650/700/750/800/850/900mA		

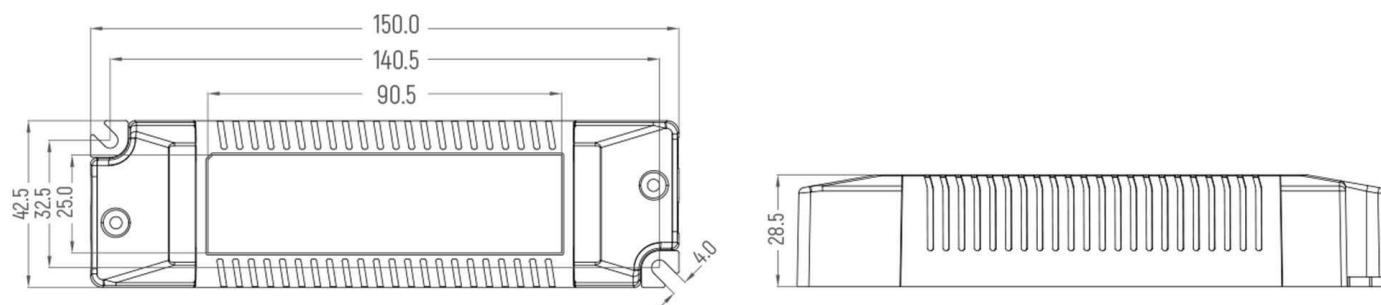
Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Not suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - DALI-Bus according to IEC 62386 DALI 2.0 / Intelli-Push	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862177

Power supply unit, BASIC, DIM, Multi CC, EUP30D-1HMC-0, DALI 2.0

**Dimensions & Weight****Absolute maximum ratings**

Length	150,00 mm	Operating temperature	-20°C - +50°C
Width	42,50 mm	Case temperature	85 °C
Height	28,50 mm	max. amount of circuit breakers	B10A=25, B16A=40, C10A=50, C16A=80
Diameter	0,00 mm	max. inrush current	28A/14µs
Product weight	124 g	capacitive load	

Multi-CC variable Leistungs-/Spannungsbereiche / Multi-CC variable power/voltage ranges

Stromstärke / Current	Leistung / Power	Spannung / Voltage
550mA	5,00W - 24,70W	9V - 45V
600mA	5,40W - 27,00W	9V - 45V
650mA	5,90W - 29,00W	9V - 45V
700mA	6,30W - 30,10W	9V - 43V
750mA	6,80W - 30,00W	9V - 40V
800mA	7,20W - 30,40W	9V - 38V
850mA	7,70W - 29,70W	9V - 35V
900mA	8,10W - 30,60W	9V - 34V

max. 2 Lampen je Kanal - Spannungsbereich überprüfen! / max. 2 lamps per channel - check voltage range!