

**Artikel Nr.: 872015**

Netzgerät, MINI, DIM, CC, D70004NT/4W



IP65 CE

**Elektrische Daten**

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	2,10-4,00 W	Leistungsfaktor	0,90
Ausgangsspannung	3-6V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	700 mA		

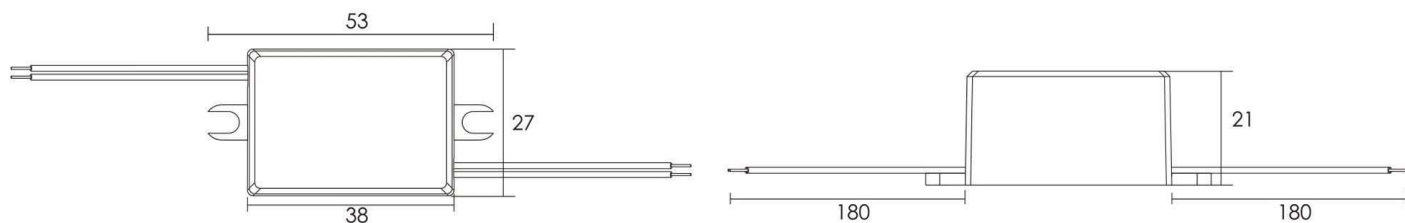
**Produkteigenschaften**

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - Phasenanschnitt oder Phasenabschnitt	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 872015**

Netzgerät, MINI, DIM, CC, D70004NT/4W

**Abmessungen und Gewicht****Grenzwerte**

Länge	53,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	27,00 mm	Gehäusetemperatur	80 °C
Höhe	21,00 mm	max. Menge Sicherungsautomaten	B10A=35, B16A=56, C10A=74, C16A=118
Durchmesser	0,00 mm	max. Einschaltstrom	5A/300µs
Gewicht	45 g	kapazitive Last	4,71nF

**Article No.: 872015**

Power supply unit, MINI, DIM, CC, D70004NT/4W



**IP65 CE**

**Electrical Characteristics**

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	2,10-4,00 W	Power factor	0,90
Output voltage	3-6V DC	Connection possibility	wire with open ends
Output current	700 mA		

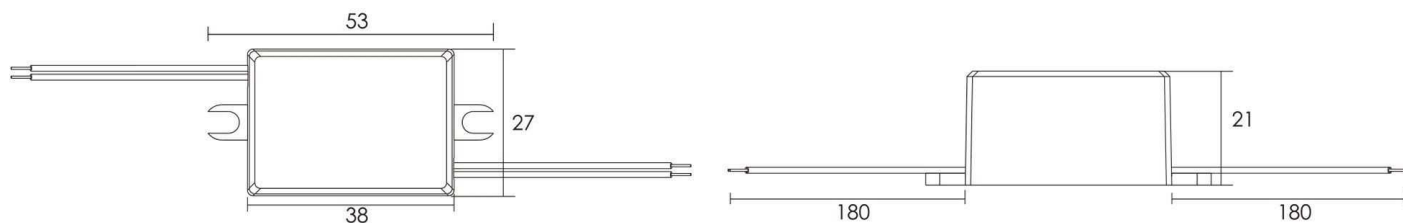
**Product features**

Protection class II	Overvoltage protection
<b>SELV</b> Low voltage protection	Lamp control gear 110
Short circuit protection	Suitable for furniture installation
Overload protection	<b>ErP</b> Standby-power consumption < 0,5 W
Overheating protection	<b>LVD</b> Safety according to EN 61347
Safety transformer	<b>EMC</b> Interference suppression + immunity according to EN 55015 + EN 61547
dimmable - leading edge or trailing edge	<b>EMC</b> Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 872015**

Power supply unit, MINI, DIM, CC, D70004NT/4W

**Dimensions & Weight****Absolute maximum ratings**

Length	53,00 mm	Operating temperature	-20°C - +50°C
Width	27,00 mm	Case temperature	80 °C
Height	21,00 mm	max. amount of circuit breakers	B10A=35, B16A=56, C10A=74, C16A=118
Diameter	0,00 mm	max. inrush current	5A/300µs
Product weight	45 g	capacitive load	4,71nF