

**Artikel Nr.: 872084**

Netzgerät, IP, CV, V6-75-12



**IP67 CE**

**Elektrische Daten**

|                  |                   |                     |                     |
|------------------|-------------------|---------------------|---------------------|
| Betriebsart      | spannungskonstant | Eingangsspannung    | 100-240V AC/50-60Hz |
| Leistung         | 75,00 W           | Leistungsfaktor     | 0,95                |
| Ausgangsspannung | 12V DC            | Anschlußmöglichkeit | offene Kabel        |
| Ausgangsstrom    | 0-6250 mA         |                     |                     |

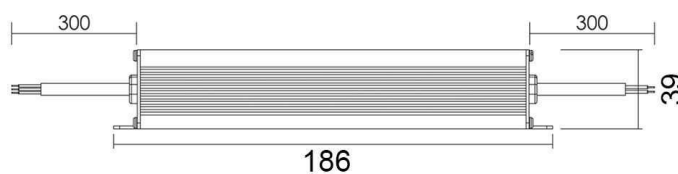
**Produkteigenschaften**

|                                                                                     |                      |                                                                                     |                                                                |
|-------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | Schutzklasse I       |  | Überspannungsschutz                                            |
| <b>SELV</b>                                                                         | Schutzkleinspannung  |  | Lampenbetriebsgerät 110                                        |
|  | Kurzschlußfest       |  | Möbeleinbau geeignet                                           |
|  | Überlastschutz       | <b>ErP</b>                                                                          | Standby-Stromverbrauch < 0,5 W                                 |
|  | Übertemperaturschutz | <b>LVD</b>                                                                          | Sicherheit nach EN 61347                                       |
|  | Sicherheitstrafo     | <b>EMC</b>                                                                          | Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547       |
|  | nicht dimmbar        | <b>EMC</b>                                                                          | Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3 |

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 872084**

Netzgerät, IP, CV, V6-75-12

**Abmessungen und Gewicht****Grenzwerte**

|             |           |                                   |                                     |
|-------------|-----------|-----------------------------------|-------------------------------------|
| Länge       | 186,00 mm | Betriebstemperatur                | -20°C - +50°C                       |
| Breite      | 64,00 mm  | Gehäusetemperatur                 | 80 °C                               |
| Höhe        | 39,00 mm  | max. Menge<br>Sicherungsautomaten | B10A=5, B16A=8,<br>C10A=10, C16A=16 |
| Durchmesser | 0,00 mm   | max. Einschaltstrom               | 35A/300µs                           |
| Gewicht     | 785 g     | kapazitive Last                   | 621,5nF                             |

**Article No.: 872084**

Power supply unit, IP, CV, V6-75-12

**IP67 CE****Electrical Characteristics**

|                |                  |                        |                     |
|----------------|------------------|------------------------|---------------------|
| Operating mode | constant voltage | Input voltage          | 100-240V AC/50-60Hz |
| Power          | 75,00 W          | Power factor           | 0,95                |
| Output voltage | 12V DC           | Connection possibility | wire with open ends |
| Output current | 0-6250 mA        |                        |                     |

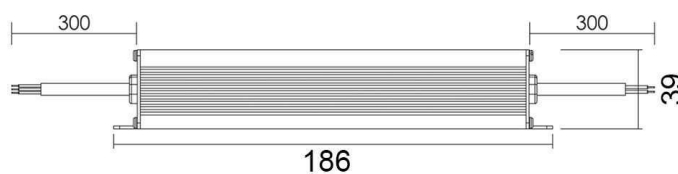
**Product features**

|                                                                                     |                          |                                                                                     |                                                                      |
|-------------------------------------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------|
|  | Protection class I       |  | Overvoltage protection                                               |
| SELV                                                                                | Low voltage protection   |  | Lamp control gear 110                                                |
|  | Short circuit protection |  | Suitable for furniture installation                                  |
|  | Overload protection      | ErP                                                                                 | Standby-power consumption < 0,5 W                                    |
|  | Overheating protection   | LVD                                                                                 | Safety according to EN 61347                                         |
|  | Safety transformer       | EMC                                                                                 | Interference suppression + immunity according to EN 55015 + EN 61547 |
|  | not dimmable             | EMC                                                                                 | Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3   |

Black fields are applicable / gray fields are not applicable

**Article No.: 872084**

Power supply unit, IP, CV, V6-75-12

**Dimensions & Weight****Absolute maximum ratings**

|                |           |                                 |                                  |
|----------------|-----------|---------------------------------|----------------------------------|
| Length         | 186,00 mm | Operating temperature           | -20°C - +50°C                    |
| Width          | 64,00 mm  | Case temperature                | 80 °C                            |
| Height         | 39,00 mm  | max. amount of circuit breakers | B10A=5, B16A=8, C10A=10, C16A=16 |
| Diameter       | 0,00 mm   | max. inrush current             | 35A/300µs                        |
| Product weight | 785 g     | capacitive load                 | 621,5nF                          |