

Artikel Nr.: 872089

Netzgerät, IP, CV, V6-240-24



IP67 CE

Elektrische Daten

| | | | |
|------------------|-------------------|---------------------|---------------------|
| Betriebsart | spannungskonstant | Eingangsspannung | 100-240V AC/50-60Hz |
| Leistung | 240,00 W | Leistungsfaktor | 0,95 |
| Ausgangsspannung | 24V DC | Anschlußmöglichkeit | offene Kabel |
| Ausgangsstrom | 0-10000 mA | | |

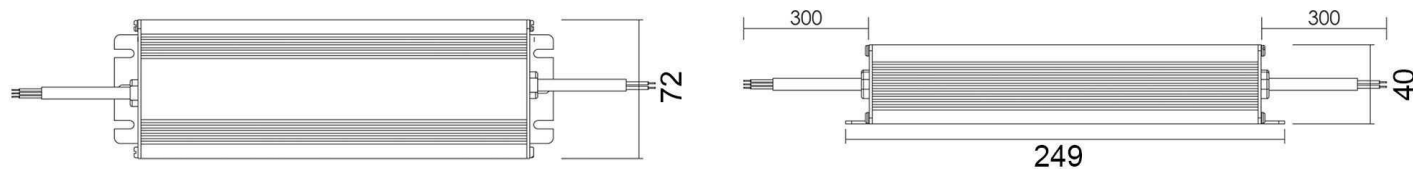
Produkteigenschaften

| | |
|---------------------------------|---|
| Schutzklasse I | Überspannungsschutz |
| SELV Schutzkleinspannung | Lampenbetriebsgerät 110 |
| Kurzschlußfest | Möbeleinbau geeignet |
| Überlastschutz | ErP Standby-Stromverbrauch < 0,5 W |
| Übertemperaturschutz | LVD Sicherheit nach EN 61347 |
| Sicherheitstrafo | EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547 |
| nicht dimmbar | EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3 |

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 872089

Netzgerät, IP, CV, V6-240-24

**Abmessungen und Gewicht****Grenzwerte**

| | | | |
|-------------|-----------|-----------------------------------|-----------------------------------|
| Länge | 249,00 mm | Betriebstemperatur | -20°C - +50°C |
| Breite | 72,00 mm | Gehäusetemperatur | 80 °C |
| Höhe | 40,00 mm | max. Menge Sicherungsautomaten | B10A=2, B16A=3, C10A=4, C16A=7 |
| Durchmesser | 0,00 mm | max. Einschaltstrom | 75A/300µs |
| Gewicht | 1247 g | kapazitive Last | 626,3nF |

Article No.: 872089

Power supply unit, IP, CV, V6-240-24












IP67 CE

Electrical Characteristics

| | | | |
|----------------|------------------|------------------------|---------------------|
| Operating mode | constant voltage | Input voltage | 100-240V AC/50-60Hz |
| Power | 240,00 W | Power factor | 0,95 |
| Output voltage | 24V DC | Connection possibility | wire with open ends |
| Output current | 0-10000 mA | | |

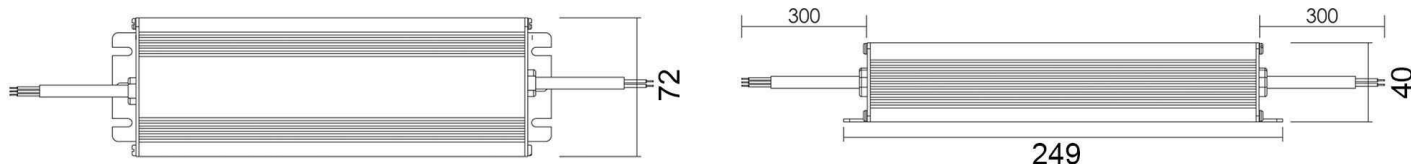
Product features

| | |
|--|---|
|  Protection class I |  Overvoltage protection |
| SELV Low voltage protection |  Lamp control gear 110 |
|  Short circuit protection |  Suitable for furniture installation |
|  Overload protection | ErP Standby-power consumption < 0,5 W |
|  Overheating protection | LVD Safety according to EN 61347 |
|  Safety transformer | EMC Interference suppression + immunity according to EN 55015 + EN 61547 |
|  not dimmable | EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3 |

Black fields are applicable / gray fields are not applicable

Article No.: 872089

Power supply unit, IP, CV, V6-240-24

**Dimensions & Weight****Absolute maximum ratings**

| | | | |
|----------------|-----------|---------------------------------|--------------------------------|
| Length | 249,00 mm | Operating temperature | -20°C - +50°C |
| Width | 72,00 mm | Case temperature | 80 °C |
| Height | 40,00 mm | max. amount of circuit breakers | B10A=2, B16A=3, C10A=4, C16A=7 |
| Diameter | 0,00 mm | max. inrush current | 75A/300µs |
| Product weight | 1247 g | capacitive load | 626,3nF |