

Artikel Nr.: 872095

Netzgerät, IP, DIM, CV, V2-200-12T



IP67 CE

Elektrische Daten

Betriebsart	spannungskonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	66,00-200,00 W	Leistungsfaktor	0,95
Ausgangsspannung	12V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	5500-16700 mA		

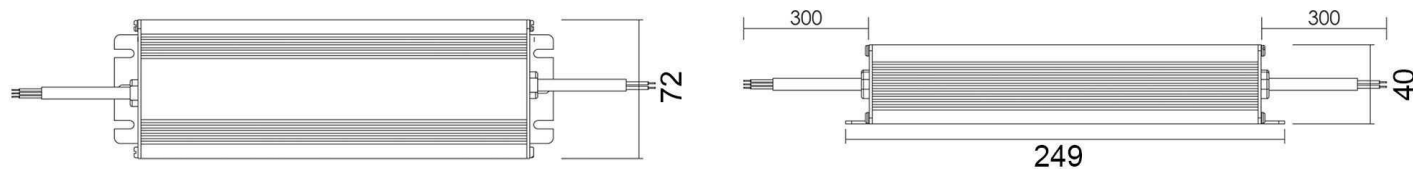
Produkteigenschaften

Schutzklasse I	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
dimmbar - Phasen-/abschnitt	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 872095

Netzgerät, IP, DIM, CV, V2-200-12T

**Abmessungen und Gewicht****Grenzwerte**

Länge	249,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	72,00 mm	Gehäusetemperatur	80 °C
Höhe	40,00 mm	max. Menge Sicherungsautomaten	B10A=2, B16A=4, C10A=4, C16A=8
Durchmesser	0,00 mm	max. Einschaltstrom	75A/300µs
Gewicht	1262 g	kapazitive Last	138,16nF

Article No.: 872095

Power supply unit, IP, DIM, CV, V2-200-12T












IP67 CE

Electrical Characteristics

Operating mode	constant voltage	Input voltage	220-240V AC/50-60Hz
Power	66,00-200,00 W	Power factor	0,95
Output voltage	12V DC	Connection possibility	wire with open ends
Output current	5500-16700 mA		

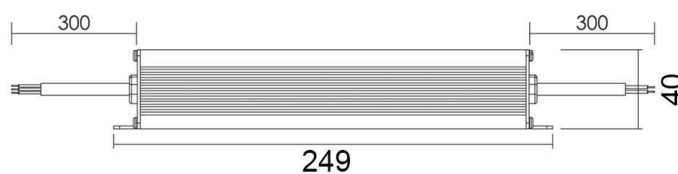
Product features

 Protection class I	 Overvoltage protection
SELV Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 dimmable - leading/trailing edge	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 872095

Power supply unit, IP, DIM, CV, V2-200-12T

**Dimensions & Weight****Absolute maximum ratings**

Length	249,00 mm	Operating temperature	-20°C - +50°C
Width	72,00 mm	Case temperature	80 °C
Height	40,00 mm	max. amount of circuit breakers	B10A=2, B16A=4, C10A=4, C16A=8
Diameter	0,00 mm	max. inrush current	75A/300µs
Product weight	1262 g	capacitive load	138,16nF