

Artikel Nr.: 872096

Netzgerät, IP, DIM, CV, V2-200-24T



IP67 CE

Elektrische Daten

Betriebsart	spannungskonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	66,00-200,00 W	Leistungsfaktor	0,95
Ausgangsspannung	24V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	2700-8300 mA		

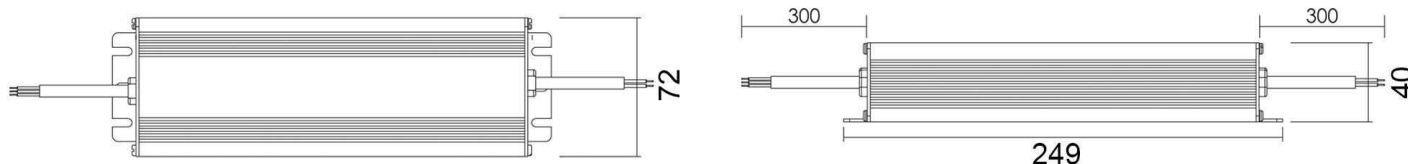
Produkteigenschaften

	Schutzklasse I		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - Phasen-/abschnitt	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 872096

Netzgerät, IP, DIM, CV, V2-200-24T

**Abmessungen und Gewicht****Grenzwerte**

Länge	249,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	72,00 mm	Gehäusetemperatur	80 °C
Höhe	40,00 mm	max. Menge Sicherungsautomaten	B10A=2, B16A=4, C10A=4, C16A=8
Durchmesser	0,00 mm	max. Einschaltstrom	75A/300µs
Gewicht	1262 g	kapazitive Last	145,15nF

Article No.: 872096

Power supply unit, IP, DIM, CV, V2-200-24T

**IP67 CE****Electrical Characteristics**

Operating mode	constant voltage	Input voltage	220-240V AC/50-60Hz
Power	66,00-200,00 W	Power factor	0,95
Output voltage	24V DC	Connection possibility	wire with open ends
Output current	2700-8300 mA		

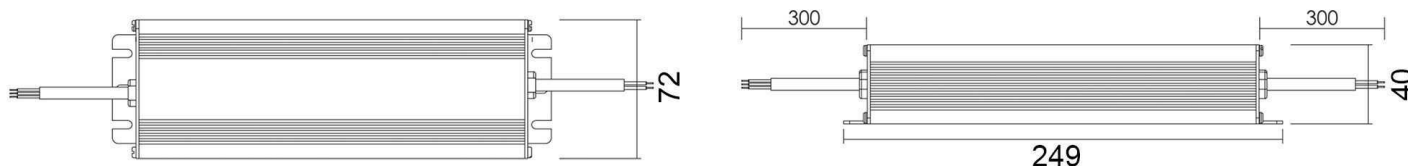
Product features

	Protection class I		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - leading/trailing edge	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 872096

Power supply unit, IP, DIM, CV, V2-200-24T

**Dimensions & Weight****Absolute maximum ratings**

Length	249,00 mm	Operating temperature	-20°C - +50°C
Width	72,00 mm	Case temperature	80 °C
Height	40,00 mm	max. amount of circuit breakers	B10A=2, B16A=4, C10A=4, C16A=8
Diameter	0,00 mm	max. inrush current	75A/300µs
Product weight	1262 g	capacitive load	145,15nF