

**Artikel Nr.: 872643**

Netzgerät, BASIC, DIM, CC, D350012U/12W



IP20 CE

**Elektrische Daten**

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	6,30-12,00 W	Leistungsfaktor	0,95
Ausgangsspannung	18-35V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	350 mA		

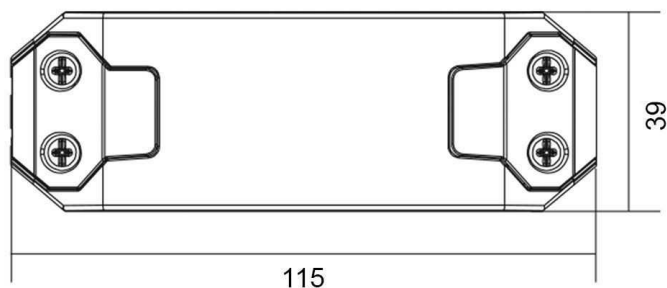
**Produkteigenschaften**

Schutzklasse II	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
dimmbar - Phasen-/abschnitt	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 872643**

Netzgerät, BASIC, DIM, CC, D350012U/12W

**Abmessungen und Gewicht****Grenzwerte**

Länge	115,00 mm	Betriebstemperatur	-20°C - +45°C
Breite	39,00 mm	Gehäusetemperatur	90 °C
Höhe	22,00 mm	max. Menge Sicherungsautomaten	B10A=35, B16A=56, C10A=74, C16A=118
Durchmesser	0,00 mm	max. Einschaltstrom	5A/300µs
Gewicht	80 g	kapazitive Last	46,72pF

Article No.: 872643

Power supply unit, BASIC, DIM, CC, D350012U/12W












IP20 CE

### Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	6,30-12,00 W	Power factor	0,95
Output voltage	18-35V DC	Connection possibility	wire with open ends
Output current	350 mA		

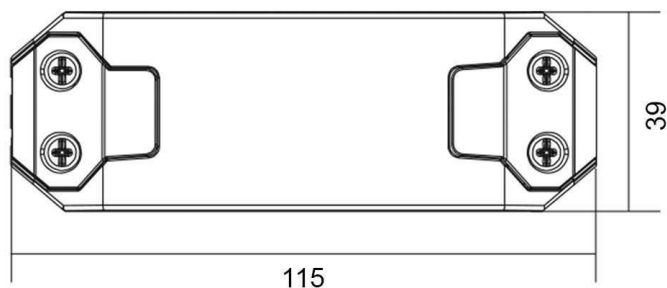
### Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - leading/trailing edge	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 872643**

Power supply unit, BASIC, DIM, CC, D350012U/12W

**Dimensions & Weight****Absolute maximum ratings**

Length	115,00 mm	Operating temperature	-20°C - +45°C
Width	39,00 mm	Case temperature	90 °C
Height	22,00 mm	max. amount of circuit breakers	B10A=35, B16A=56, C10A=74, C16A=118
Diameter	0,00 mm	max. inrush current	5A/300µs
Product weight	80 g	capacitive load	46,72pF