



Client: \_\_\_\_\_

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Order Code: \_\_\_\_\_

Quantity: \_\_\_\_\_

**Dyna Accent Mini** is a compact, high power, LED floodlight designed to fit in the tightest of spaces. It features an internal 100-240VAC + 277VAC power supply, onboard DMX+RDM driver, and each unit carries Acclaim’s Aria wireless DMX technology inside. Dyna Accent Mini can be mounted in three ways, via the junction box mount, surface mount, or stake mount for landscape applications. It comes with a narrow 7° or 12° beam standard, with optional quick-change spread lenses for wider applications. It’s low profile and high output make it the perfect solution for outdoor commercial and landscape flood projects.

## SPECIFICATIONS

Colors	QS, QW4, QW6 2700K, 3000K, 3500K, 4000K
Beam Angles	7° / 12° standard, 20°, 40°, 60°, 10° x 60° spread lens options
Photometrics	Up to 760 lumens at 13W, 58 l/pw, 80 CRI (4000K, 7°) - See page 4 for all models
Effective Projected Area	1.09 ft <sup>2</sup>
Control	DMX+RDM and Aria wireless native, 0-10V via external UDM
Max Fixtures in Series	32 via DMX
Power Consumption	13W
Operating Voltage	100-240VAC, 277VAC 50/60 Hz
Lumen Maintenance	L70 @ 150,000 hours (25° C)
Mounting	1/2" NPT pipe (O.D.=0.855") , 4" round elec. box, landscape stake or surface mounting plate
Finish	Gray (standard), black, white, or custom (provide RAL #)*
Material	Die cast aluminum, glass top lens. Optional marine environment coating available
Ambient Operating Temperature	-40° F to 122° F (-40° C to 50° C)
IP Rating	IP66, wet location
IK Rating	IK07, protection against 2 joule impact
Fixture Connectors	3.28' (1m) attached hybrid cable for AC power and DMX connection, bare wire ends
Warranty	5 Years, limited
Weight	2.87 lbs. (1.3 kg)
Dimensions	See page 4

### Certifications




\* indicates special order


## ORDER CODES

\* indicates special order

**Note:** Dyna Accent Mini comes standard with a 1/2" NPT pipe thread for mounting out of the box. For other mounting solutions, please choose one when ordering under "Optional Mounting Hardware" section below.

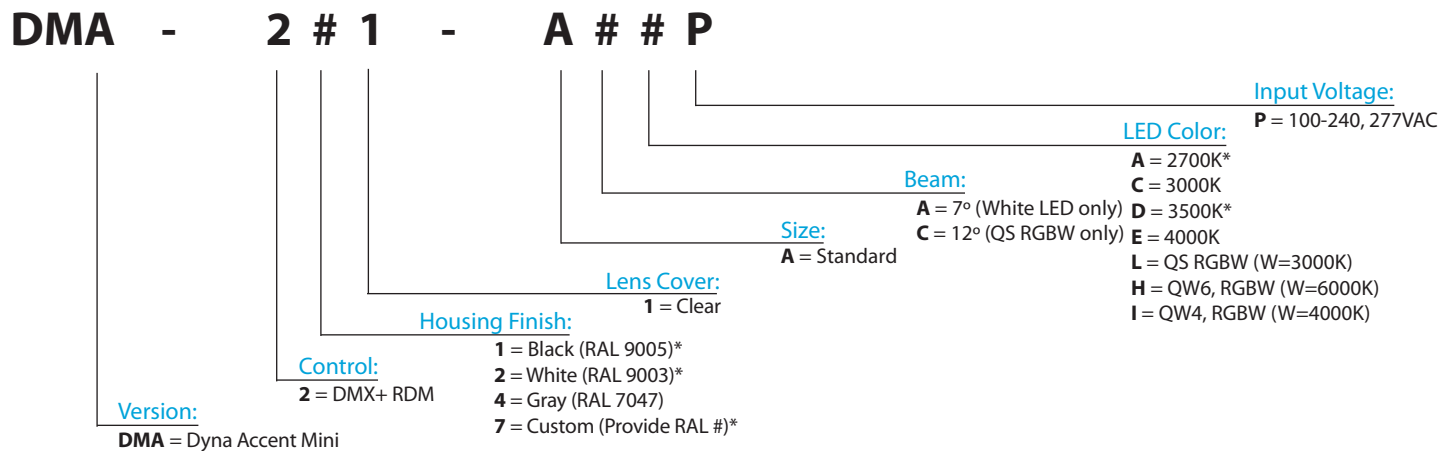


## OPTIONAL MOUNTING HARDWARE




**DMAEBM**  
4" round electrical box mount  
for Dyna Accent Mini



**DMADSM**  
Direct surface mount  
for Dyna Accent Mini



**DMASTM**  
Landscape stake mount  
for Dyna Accent Mini



**DYNAHEB#**  
For use with 4" round electrical box mount  
Available in 6", 12" and 36" lengths  
Order Code Example: DYNAHEB6

## RELATED COMPONENTS

### Optional Beam Accessories




**DMASL20**  
*20° Spread lens for Dyna Accent Mini*

**DMASL40**  
*40° Spread lens for Dyna Accent Mini*

**DMASL60**  
*60° Spread lens for Dyna Accent Mini*

**DMASL1060**  
*10° x 60° Spread lens for Dyna Accent Mini*




**DMAFS** *Full snoot for Dyna Accent Mini, Gray*

**DMAFS-B** *Full snoot for Dyna Accent Mini, Black*

**DMAFS-W** *Full snoot for Dyna Accent Mini, White*

### Fixture Setup Accessories



**XMT350**  
*DMX + RDM Addressing and Testing Tool*

### Control Accessories




**ARIA WDS**  
*Aria Wireless DMX System*



**UDM**  
*Universal Dimming Module  
Converts 0-10V Sink and Source to DMX*

## DIMENSIONS

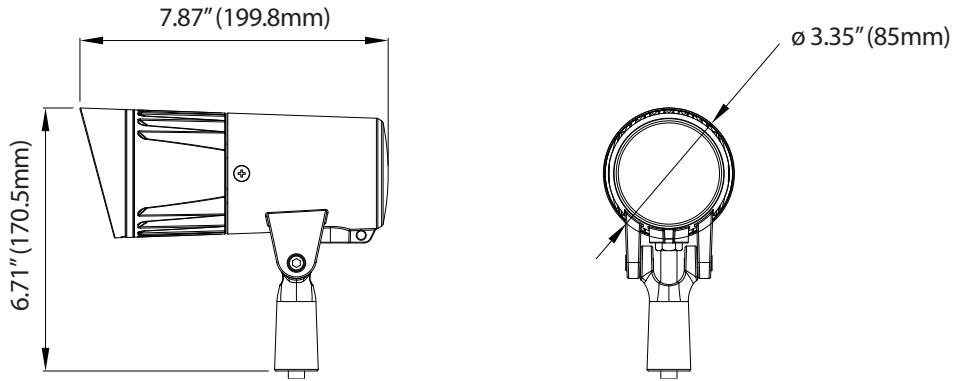

## PHOTOMETRICS

Color Temp / Beam	Lumens	Center Candela	Efficacy (l/pw)	CRI (Ra)	TM30
<b>2700K, 7°</b>	642	21910	51	80	81.9
<b>3000K, 7°</b>	757	23911	59	80.4	80.7
<b>3500K, 7°</b>	735	26645	58	80	80.2
<b>4000K, 7°</b>	760	30865	60	80.4	80.8
<b>QS RGBW</b>	303	5514	21	N/A	N/A