



# MASTER VALUE LEDspot MV

## MAS LED spot VLE D 3.7-35W GU10 927 36D

Delivering a warm, halogen-like accent beam, MASTER VALUE LEDspot MV is a perfect for spot lighting. Thanks to its high CRI, it realizes more natural colors, enabling cozy and comfortable ambience for residential, hospitality and emphasize the beauty of merchandise in retail. These LEDspots have the familiar look and feel of glass spots, keeping the classic beauty of glass spots and adding the strong performance from LED technology. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers.

### Product data

General Information		Color Consistency	
Cap-Base	GU10 [ GU10]	Color Consistency	<6
Nominal Lifetime (Nom)	25000 h	Color Rendering Index (Nom)	90
Switching Cycle	50000X	LLMF At End Of Nominal Lifetime (Nom)	70 %
Technical Type	3.7-35W	Luminous Flux In 90° Cone (Rated)	260 lm
Light Technical		Operating and Electrical	
Color Code	927	Input Frequency	50 to 60 Hz
Beam Angle (Nom)	36 °	Power (Rated) (Nom)	3.7 W
Luminous Flux (Nom)	260 lm	Lamp Current (Nom)	20 mA
Luminous Flux (Rated) (Nom)	260 lm	Wattage Equivalent	35 W
Luminous Intensity (Nom)	500 cd	Starting Time (Nom)	0.5 s
Color Designation	Warm White (WW)	Warm Up Time To 60% Light (Nom)	0.5 s
Rated Beam Angle	36 °	Power Factor (Nom)	0.8
Correlated Color Temperature (Nom)	2700 K	Voltage (Nom)	220-240 V
Luminous Efficacy (rated) (Nom)	78.38 lm/W		

# MASTER VALUE LEDspot MV

## Temperature

T-Case Maximum (Nom)	80 °C
----------------------	-------

## Controls and Dimming

Dimmable	Yes
----------	-----

## Approval and Application

Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	A+
Energy Consumption kWh/1000 h	4 kWh


## Product Data

Full product code	871869670773900
Order product name	MAS LED spot VLE D 3.7-35W GU10 927 36D
EAN/UPC - Product	8718696707739
Order code	929001348202
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001348202
Net Weight (Piece)	0.038 kg

## Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



## Dimensional drawing



GU10 230V4W-35W 265lm 36D 2700K GU10 Dim

Product	D	C
MAS LED spot VLE D 3.7-35W GU10 927 36D	50 mm	54 mm

## Photometric data

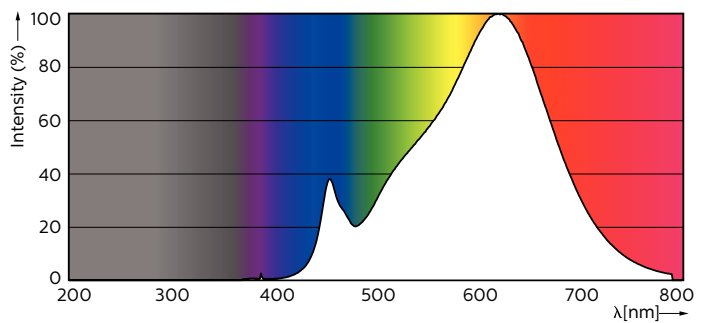

MASTER LEDspotMV 35W GU10 927 36D 260lm

# MASTER VALUE LEDspot MV

