


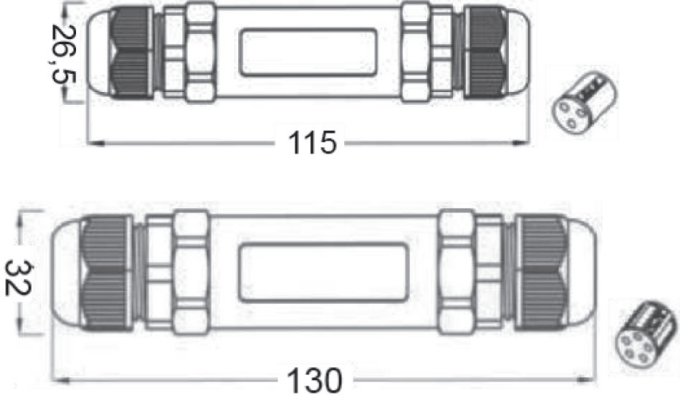


Artikel Nr.: 730001 / 730003

Wasserdichte Schraubverbindung aus PA66GF UL90 VO GWT 960°C /
waterproofed screwed cable gland, material PA66GF UL90 VO GWT 960°C

 <p> RoHS 2002/95/EC IP68 </p>		
<p>Beschreibung description</p>	730001	730003
<p>Gehäusematerial case material</p>	PA66GF UL90 VO GWT 960°C	
<p>Gehäusefarbe case colour</p>	schwarz black	
<p>Abmessungen dimensions</p>	115x26,5mm	130x32mm
<p>passende Kabel suitable cable</p>	H05VV-F	H05VV-F
<p>Pole pole</p>	3	5
<p>min Querschnitt / Durchmesser min cross-section / diameter</p>	3G1,5mm ² / Ø7mm	5G1,5mm ² / Ø8mm
<p>max Querschnitt / Durchmesser max cross-section / diameter</p>	3G4mm ² / Ø13mm	5G4mm ² / Ø17mm
<p>max Strom max current</p>	32A	32A
<p>max Spannung max voltage</p>	450Vac	450Vac
<p>max Druck max pressure</p>	5 Bar	5 Bar
<p>Temperatur temperature</p>	-40°C - 85°C	-40°C - 85°C