

Artikel Nr.: 872093

Netzgerät, IP, CV, V6-100-12












IP67 CE

Elektrische Daten

Betriebsart	spannungskonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	100,00 W	Leistungsfaktor	0,95
Ausgangsspannung	12V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	0-8340 mA		

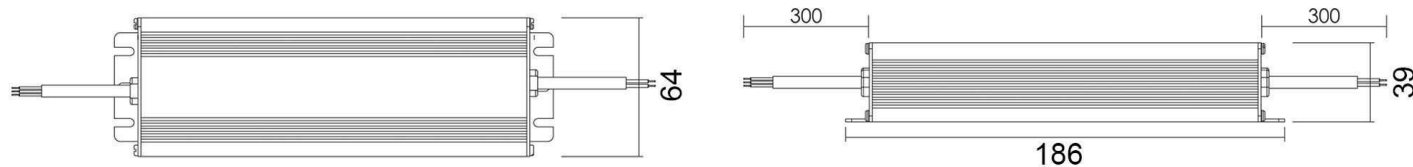
Produkteigenschaften

 Schutzklasse I	 Überspannungsschutz
SELV Schutzkleinspannung	 Lampenbetriebsgerät 110
 Kurzschlußfest	 Möbeleinbau geeignet
 Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
 Übertemperaturschutz	LVD Sicherheit nach EN 61347
 Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
 nicht dimmbar	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 872093

Netzgerät, IP, CV, V6-100-12

**Abmessungen und Gewicht****Grenzwerte**

Länge	186,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	64,00 mm	Gehäusetemperatur	80 °C
Höhe	39,00 mm	max. Menge Sicherungsautomaten	B10A=3, B16A=5, C10A=7, C16A=11
Durchmesser	0,00 mm	max. Einschaltstrom	50A/300µs
Gewicht	797 g	kapazitive Last	621,5nF

Article No.: 872093

Power supply unit, IP, CV, V6-100-12












IP67 CE

Electrical Characteristics

Operating mode	constant voltage	Input voltage	100-240V AC/50-60Hz
Power	100,00 W	Power factor	0,95
Output voltage	12V DC	Connection possibility	wire with open ends
Output current	0-8340 mA		

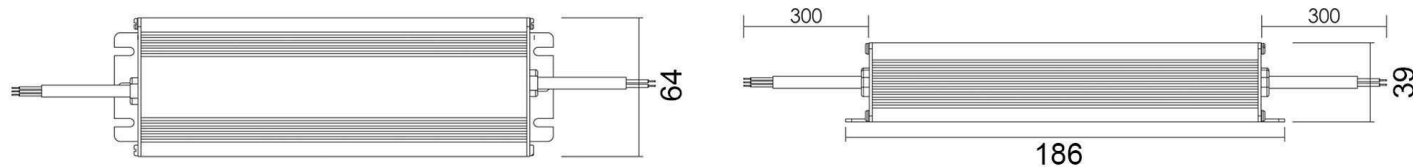
Product features

 Protection class I	 Overvoltage protection
SELV Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 not dimmable	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 872093

Power supply unit, IP, CV, V6-100-12

**Dimensions & Weight****Absolute maximum ratings**

Length	186,00 mm	Operating temperature	-20°C - +50°C
Width	64,00 mm	Case temperature	80 °C
Height	39,00 mm	max. amount of circuit breakers	B10A=3, B16A=5, C10A=7, C16A=11
Diameter	0,00 mm	max. inrush current	50A/300µs
Product weight	797 g	capacitive load	621,5nF